


TRIS-2002FIN fully isolated wall outlet



- **Dual output isolator**
- **Ingress Safe™** - unique passive ingress reduction technology
- **Modem Safe™** surge protection and intermodulation reduction solution
- **CPD Safe™** - nickel plated, zinc alloy casing and NiSn plated, machined brass input connector with silver plated F-inner spring
- **Diplex filters for low loss**
- **Good intermodulation performance**
- **Low leakage current**

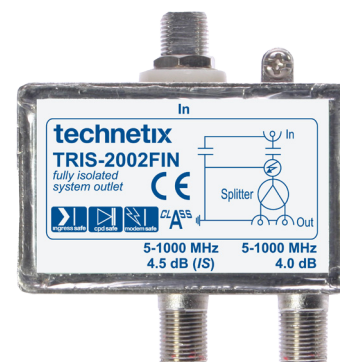

Overview

Isolators (frequently referred to as system outlets) are used to separate in-home installations or subscriber equipment from the CATV network. They prevent hazardous voltages from being transferred to in-home installations.

Technetix supplies two main types of isolator - fully and semi-isolated system outlets. The TRIS series comprises fully isolated system outlets developed to meet the needs of the European market. They incorporate high voltage capacitors that provide isolation to both the inner and the outer conductors of the coaxial connectors. There are a variety of one, two and three port isolators in the TRIS series as well as many accessories such as ABS housings, adaptor plates and push-on filters.

The TRIS-2002FIN dual output isolator has a nickel plated, zinc alloy casing and a NiSn plated, machined brass input connector. The inner spring of the connector has been designed to accept coax cables with an inner conductor of between 0.51 and 1.20 mm. It retains this elasticity and provides effective clamping force even when varying thicknesses of inner conductor are connected in succession.

Ingress Safe

Our patented Ingress Safe technology uses a phase cancellation technique to considerably reduce ingress created within the home. It has no adverse effect on the CATV spectrum and is transparent to the forward and reverse path signals.

- Significantly reduces noise on CATV networks, improving network performance

- Field tests show Ingress Safe units in the distribution network can deliver improvement in the carrier to noise ratio that averages from between 3 dB and 12 dB, depending on the network topology
- Prevents or delays the need to deploy technicians to rectify faults caused by the cumulative effects of ingress on network performance and customer service.

Modem Safe

Modem Safe is a highly effective surge protection solution for sensitive network and in-home CPE. Based on passive circuits, the technology does not rely on discharge tubes, extending the lifespan of the solution.

- Blocks high and low voltage pulses and unwanted DC voltages
- Prevents internal ferrites within the product from becoming magnetised (avoiding deterioration in the performance of CPE)
- Drives fewer reported faults
- Improves customer service
- Reduces truck rolls

CPD Safe

CPD (Common Path Distortion) is well known for producing signal interference on networks. It is caused by electrolytic corrosion or the oxidisation of dissimilar metals when in close contact. CPD Safe technology protects against CPD:

- Removes a primary cause of CPD
- Reduces signal interference on the network
- Drives fewer reported faults
- Reduces truck rolls
- Improves customer service

TRIS-2002FIN fully isolated wall outlet

Specifications

		MHz	Min	Typ	Max	Remarks
Equipment passband ¹		5 - 1000				All specifications are measured at room temperature
Insertion loss (dB)	In -> Out 1	5 - 10	3.6	4.1	4.5	1 Operating frequency range 10 to 1000 MHz
		10 - 470	3.3	3.8	4.3	2 Where frequency is above 40 MHz, deduct 1.5 dB/Octave
		470 - 862	3.3	4.0	4.7	3 Test methods for frequencies according to EN 50083-2 2006.
		862 - 1000	3.6	4.3	5.0	Operating frequency ranges: 10-1000 MHz according to IG 56620 01
	In -> Out 2	5 - 10	4.1	4.6	5.1	4 Tested according to EN 60728-11 2005
		10 - 470	3.8	4.3	4.8	5 Two carriers (60 and 65 MHz) output to output @ 120 dBµV/60dBmV, before surge
		470 - 862	3.8	4.5	5.2	6 Two carriers (60 and 65 MHz) output to output @ 120 dBµV/60dBmV, after 10 pulses (25 V/1.2µs rise time/500µs duration) at input port
		862 - 1000	4.0	4.8	5.5	7 Two carriers (60 and 65 MHz) output to output @ 120 dBµV/60dBmV, after 1 pulse (1 kV 1.2µs/50µs, IEC 61000-4-5 2005 level 2) at input port
Return loss (dB)	In / Out	5 - 40	20.0			8 Tested according to IEC 61000-4-5 2005
		40 - 1000	20.0			9 Additional protection via Modem Safe circuit allows a maximum output of 35 V
Isolation (dB) ²	Out -> Out	5 - 10	22.0			10 F-spring test pin acceptance 0.51mm min to 1.2mm max
		10 - 65	35.0			
		65 - 1000	26.0			
Screening efficiency (dB) ³		8 - 10	70.0			
		10 - 12	80.0			
		12 - 300	85.0			
		300 - 470	80.0			
		470 - 1000	75.0			
Group Delay $\Delta F=4.43$ MHz		10 - 1000		8 ns		
Galvanic isolation 2120 V DC (mA, max) ⁴	Inner (input) - Inner (output)		0.7			
	Outer (input) - Outer (output)		0.7			
Galvanic isolation 230 V AC (mA, max) ⁴	Inner (input) - Inner (output)		2.0			
	Outer (input) - Outer (output)		2.0			
Intermodulation p+q (dB, min)	No surge ⁵		-115.0			
	25 V surge ⁶		-115.0			
	1 kV surge ⁷		-115.0			
Ingress Safe circuit	Out		Port 2			
Surge Class conformance ^{8,9}			1 kV 1.2/50µS			
Connectors ¹⁰	All ports		F-female			
Material	Housing		Nickel plated zinc die-cast			
	F-spring		Silver plated beryllium copper			
Impedance (Ohm, typ)			75			
Dimensions (mm)	L x H x D		60.0x38.0x30.0			
Equipment approval	CE					

Ordering information

Item Name	Article number
TRIS-2002FIN	10460172

© Copyright 2012 Technetix Group Limited. All rights reserved.

This document is for information only. Features and specifications are subject to change without notice. Technetix, the Technetix logo, Ingress Safe, Modem Safe and certain other marks and logos are trade marks or registered trade marks of Technetix Group Limited in the UK and certain other countries. Other brand and company names are trade marks of their respective owners. Technetix protects its technology and designs by registering patents, trade marks and designs in Europe and certain other countries.